SAN Cora® PAINT

| FASHION FOR WALLS |

ITALIA™ UNO

STONE-TEXTURED
WALL PAINT



ITALIAN INSPIRATION

SIRIM ECO-LABEL
SIRIM CRITERIA 019 : 2012
Certification No. : EL000058

ITALIA™ UNO

STONE-TEXTURED
WALL PAINT

Colour A


A1



A2


A3


Colour B



B1



B2

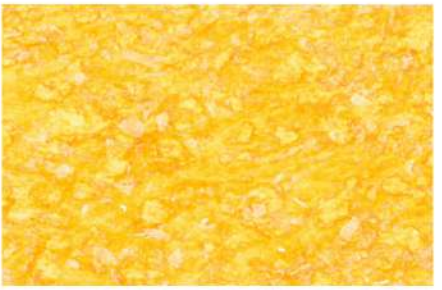
B3


Colour D

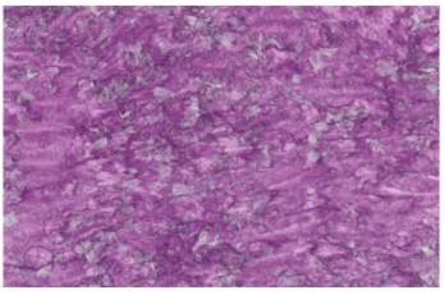

D1

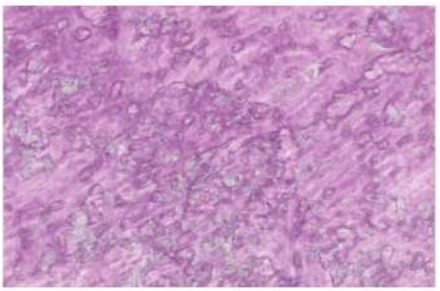

D2

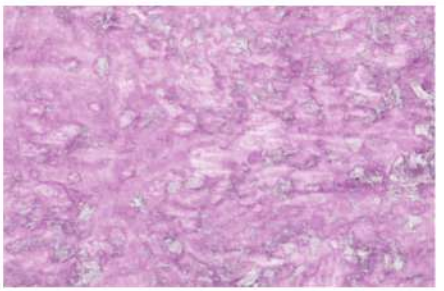
D3


Colour F

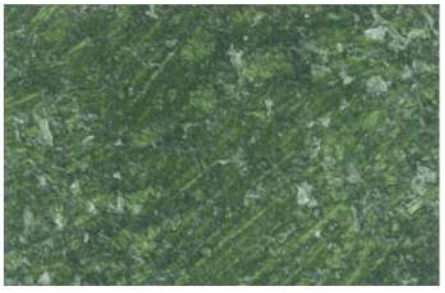
F1

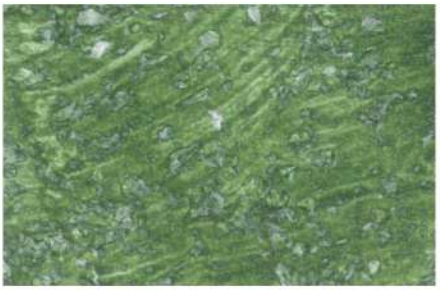

F2

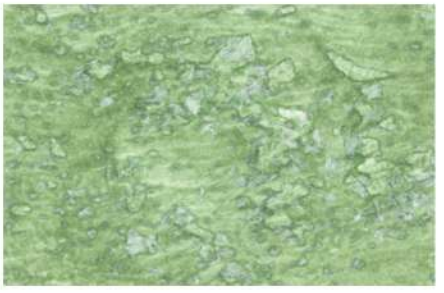
F3


Colour G

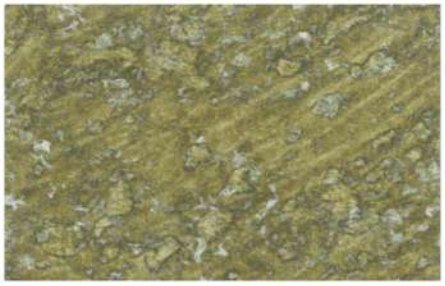

G1

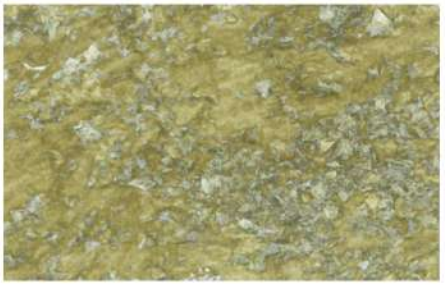


G2

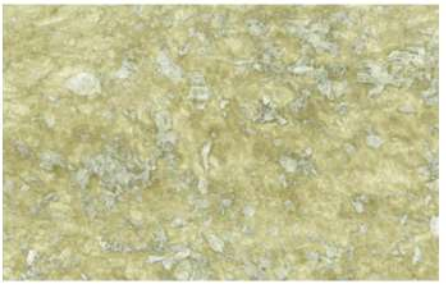


G3

Colour H

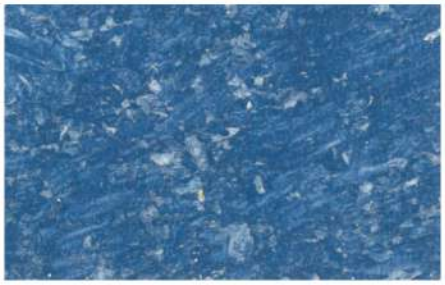

H2

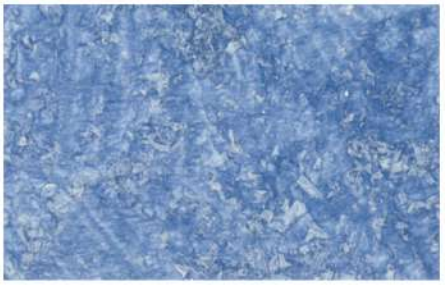

H4




H5

Colour I




I1

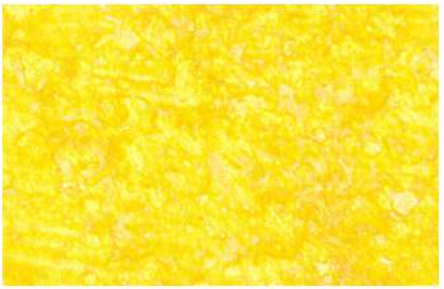


I2

I3

Colour J

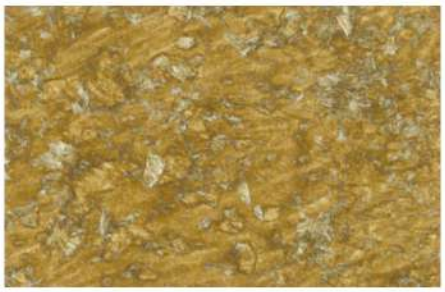

J1

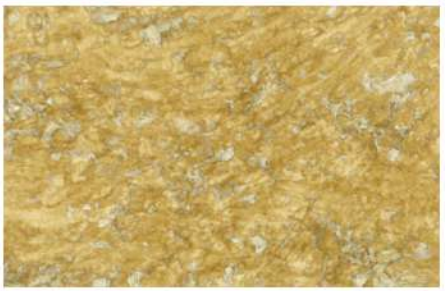

J2



J3

Colour K



K3



K4



K5

The colours on this card are as close to actual paint colours as modern printing technique allow.

QC Print 07/20

PAINT INFORMATION

Description

SANCora® **ITALIA™ UNO** is a revolutionized decorative paint using Italy technology. It is an ecological product made from natural oxide and top quality resin in a water-based system. The extraordinary effects from ***SANCora®*** **ITALIA™ UNO** let you fill your room with variety of colour combination with aesthetic & classic sensation.

Usage

For decorative of interior walls, ceilings, brickwork and cement boards with a classic aesthetic effect finish.

Pack Size

1 litre & 2.5 litres.

Technical Data

Texture	- Classic aesthetic effect finish
Colour	- Refer to ***SANCora®*** **ITALIA™ UNO** colourcard
Theoretical Coverage	- Approx. 7 - 9m² / litre (Depending on surface evenness)
Drying Time	- Single coat at standard thickness (28ºC, 50% RH) Touch Dry ≤ 3 hours Hard Dry ≤ 3 days
Recoating Time	- Not Necessary
Thinner / Cleaner	- Water

Surface Preparation

General / New : Surfaces must be sound, clean, dry and free from all defective or poorly adhering materials, dirt, grease or wax. To have better finish, rub down surface using suitable abrasive and dust off.

Previously Painted : Remove all loose, defective and unstable paint film or powdery residue by brushing thoroughly and scraping. Repair minor defects and cracks with suitable filler.

Shelf Life

2 years at ambient temperature in unopened containers.

Safety, Health and Environmental Information

Refer to Safety Data Sheet (SDS) for complete product safety informtion.

Penerangan

SANCora® **ITALIA™ UNO** merupakan cat penghiasan revolusi baru dengan teknologi Itali. Ianya satu produk ekologi dibuat daripada natural oxide dan resin kualiti tinggi dalam sistem cat air. Kesan yang luar biasa daripada ***SANCora®*** **ITALIA™ UNO** membolehkan anda untuk memenuhi bilik anda dengan pelbagai kombinasi warna yang memberikan sensasi klasik & estetik.

Penggunaan

Untuk penghiasan dinding dalaman, siling, batu bata dan papan simen dengan kemasan klasik dan estetik.

Pek Saiz

1 liter & 2.5 liter.

Data Teknikal

Tekstur	- Klasik dan estetik kemasan
Warna	- Rujuk kepada kad warna ***SANCora®*** **ITALIA™ UNO**
Liputan Teori	- Anggaran 7- 9m² / liter (Bergantung pada kelicinan permukaan)
Tempoh Kering	- Satu lapisan dengan ketebalan standard (28ºC, 50% RH) Kering disentuh ≤ 3 jam Kering sempurna ≤ 3 hari
Tempoh Lapisan Semula	- Tidak Perlu
Pencair / Pencuci	- Air

Penyediaan Permukaan

Umum / Baru : Permukaan mestilah licin, bersih, kering dan bebas daripada sebarang kotoran atau bahan mudah merekah, minyak dan lilin. Untuk mendapatkan kemasan akhir yang sempurna, gosok permukaan dengan menggunakan kertas pasir yang sesuai dan penyapu debu.

Pernah Dicat : Tanggalkan semua permukaan cat yang rosak dan tidak stabil atau sisa habuk dengan menggosok dan mengikis secara teliti. Baiki kecacatan permukaan atau rekahan kecil dengan filler yang sesuai.

Jangka Hayat

2 tahun pada suhu bilik dalam bekas tertutup.

Infomasi Keselamatan, Kesihatan dan Persekitaran

Rujuk kepada lembaran Safety Data Sheet (SDS) untuk maklumat yang lebih terperinci.

PAINT PREPARATION

ITALIA SERIES PRIMER
**** READY FOR USE*
Primer Code
7000 Primer "Pure White"



ITALIA™ UNO Neutral Coat
**** Neutral Coat add colorant*
Neutral Coat Code
Refer to **ITALIA UNO COLOR CARD**



PAINT APPLICATION

1. Apply 2 coats of **ITALIA™ SERIES Primer** with roller. Make sure the 1st coat is thoroughly dry (1-2 hours) before applying the 2nd coat. Let the 2nd coat thoroughly dry (3 hours) before applying **ITALIA™ UNO Neutral Coat**.

2. Apply 1 coat of **ITALIA™ UNO Neutral Coat** with ***SANCora®*** **ITALIA™ Brush** by using *Method I - Cross-X Strokes* or *Method II - Arch Strokes*. Following the same procedure, complete the decoration on the entire wall surfaces.

Method I - Cross-X Strokes



OR

Method II - Arch Strokes



SANCora® PAINT
KANSAI PAINT

Paint Manufacturer
SANCORA PAINTS INDUSTRIES SDN BHD (19733-T)
(Wholly Owned Subsidiary Of Kansai Paint Asia Pacific Sdn Bhd)

Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia.
Tel +605-891 8777 (8 lines) **Fax** +605-891 2277 **Email** info@sancora.com
Website www.sancora.com **Facebook** www.facebook.com/sancorapaint

Quality Management Systems Certification By :-
Intertek
Rgn No : Q117788

More on ***SANCora®***

The information contained herein is subject to change as may be required by the company without any further notice.

Rev : 03